



**TOPCON
MONOCRYSTALLINE
108TNFB10**

108_{cell}

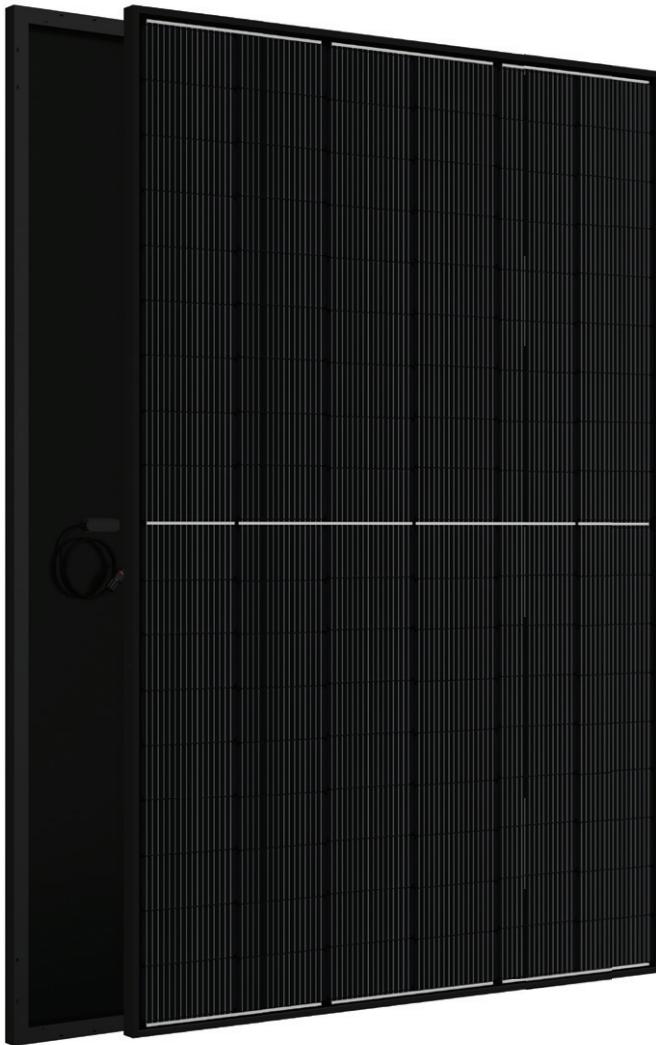

Half-Cut
Multi-BB
DARK SERIES

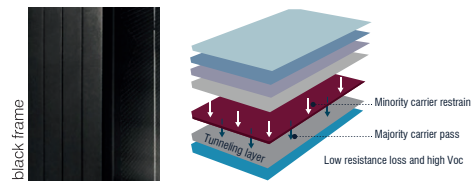

High Conversion Efficiency

High panel efficiency to guarantee high power output



Self-Cleaning And Anti-Reflection Glass

Coating glass for self-cleaning reduces surface dust.



Outstanding Low Irradiation Glass

Outstanding panel performance even in weak light conditions



Excellent Durability


Wind load up to 2400 Pa, Snow load up to 5400 Pa

0~+5W

0~+5W Positive Power Tolerance



Easy Installation

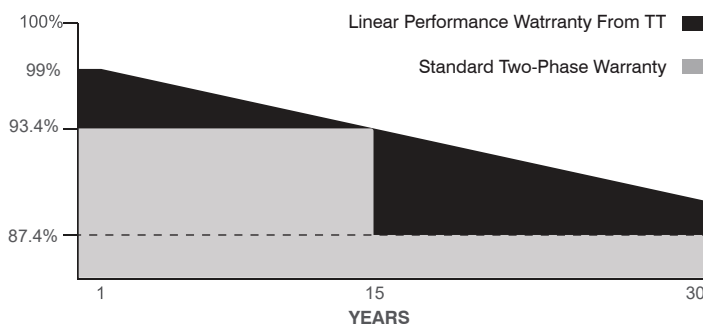

✓ 30 Years Performance Warranty ✓ 15 Years Product Warranty



IEC 61215, IEC 61730-1, IEC 61730-2
IEC 62804 PID (POTENTIAL INDUCED DEGRADATION)
IEC 61701 SALT MIST CORROSION
IEC 62716 AMMONIA CORROSION
ISO 9001:2015, ISO 14001:2015, ISO 45001:2018



DARK SERIES

108TNFB10

Peak Power (Pmax)
Module Efficiency
Maximum Power Voltage (Vmp)
Maximum Power Current (Imp)
Open Circuit Voltage (Voc)
Short Circuit Current (Isc)
Power Tolerance
Maximum System Voltage
Operating Temperature
Protection Class
Maximum Series Fuse Rating

MECHANICAL SPECIFICATION

Cell Dimensions (mm)
Cells per Module (pcs)
Weight (kg)
Panel Dimensions (mm)
Max. Wind/Snow Load (Pa)
Junction Box
Junction Box Cable Length (mm)

TT415 108TNFB10	TT420 108TNFB10	TT425 108TNFB10	TT430 108TNFB10	TT435 108TNFB10	TT440 108TNFB10	TT445 108TNFB10	TT450 108TNFB10
415 Wp	420 Wp	425Wp	430 Wp	435 Wp	440 Wp	445 Wp	450 Wp
21.25	21.51	21.76	22.02	22.28	22.53	22.79	23.04
31.74	31.94	32.14	32.34	32.54	32.74	32.94	33.14
13.08	13.15	13.23	13.30	13.37	13.44	13.51	13.58
37.71	37.91	38.11	38.31	38.51	38.71	38.91	39.11
13.88	13.95	14.03	14.10	14.17	14.24	14.31	14.38
0~+5W							
1500V DC							
-40 ~ +85°C							
Class II							
25A							
182,2x91,8							
108 (6x18)							
21.45							
1722x1134x30							
2400/5400							
IP68							
350-1600							

TEMPERATURE CHARACTERISTICS


Temp. Coeff. of (Isc)	0.040%/°C
Temp. Coeff. of (Voc)	-0.260%/°C
Temp. Coeff. of (Pmax)	-0.30%/°C

PACKING CONFIGURATION


Container 40' HC

Pieces per Pallet	35
Pieces per Container	910
Pallets per Container	26

PHYSICAL CHARACTERISTICS

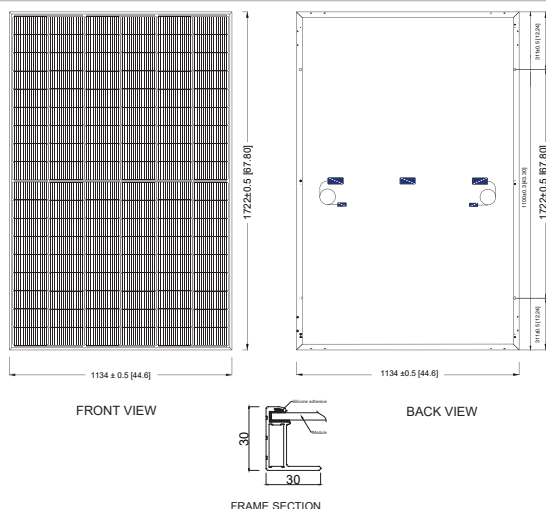

ELECTRICAL CHARACTERISTICS

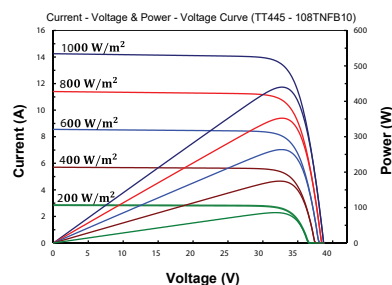

* The specifications are obtained under the standard test conditions: 1000W/m2 solar irradiance, 1.5 Air Mass and cell temperature of 25°C. Measurement uncertainty for all panels is ±6%. The actual transactions will be subject to the contracts. These parameters are for reference only and it is not a part of the contracts. The technical specifications in this document may vary. For more information, refer to the "Installation Manual".

* For roof, facades and installations on similar surfaces, solar panels should be mounted over a fire-resistant covering suitable for this application, with adequate ventilation between the back of the solar panels and the mounting surface. Improper installations are hazardous and may spark a fire. Solar panels must not be mounted on structures and roofs which are made of not fire-resistant materials such as plastic layer, transparent plastic, PVC or similar materials without any fire-protection layer. Usage and installation not in accordance with the guidelines as outlined in the installation manual will terminate the warranty. Please refer to the installation manual and the warranty documents for further details.

* TommaTech® GmbH reserves the right to change the specification of products without prior notice.