

TOPCon N-Type FLEXIBLE SOLAR PANEL



GERMAN-based company ●●●

TT200-FLEX-48TN10 200Wp



TOPCon N-Type Cell Technology

High Power Output under Low Irradiance Conditions



16 Busbar Technology

16 BB Cell Architecture for Enhanced Cell Performance



Ultra-Flexible Design

Easy Installation on Curved or Irregular Surfaces



Prismatic Surface

Maximum Light Absorption with Prismatic Surface Technology



Ultra Thin

Easy to Transport and Flexible to Install



Marine-Grade Design

High Resistance to Saltwater, Humidity, and Corrosion



Lightweight Design

Maximum Convenience for Transportation and Installation




Robust Layer Structure

Stronger Design Compared to Standard Flexible Solar Panels



IP65 Protection

High Protection Against Water and Dust

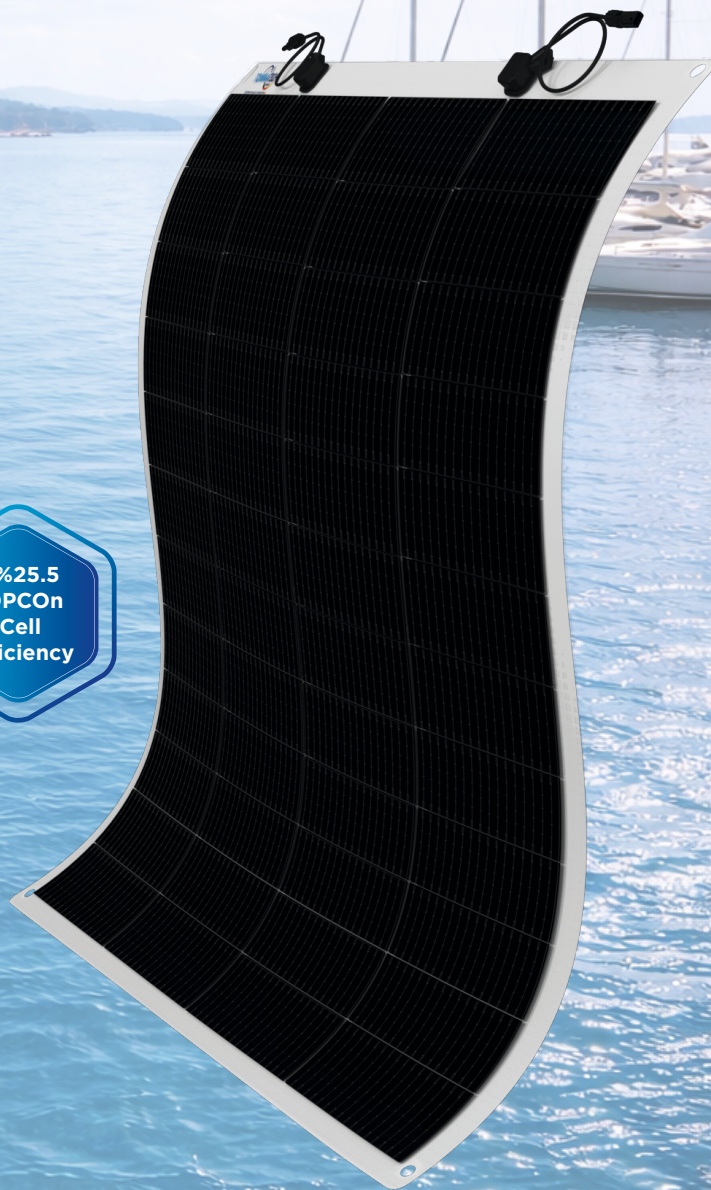

flexible

TommaTech FLEXIBLE TOPCon N-Type Flexible Solar Panel is designed for a wide range of applications, from RVs and boats to marine installations and mobile power solutions. Its lightweight and flexible design conforms perfectly to curved surfaces, providing a highly efficient and reliable energy solution.

ISO 9001:2015, ISO 14001:2015, ISO 45001:2018



TommaTechGmbH-Garching b. München /GERMANY

www.tommatech.de
mail@tommatech.de

TOPCon N-Type FLEXIBLE SOLAR PANEL

TT200-FLEX-48TN10 200Wp

ELECTRICAL CHARACTERISTICS

Parameter Model	TT200-FLEX-48TN10
Maximum Power (Pmax)	200
Power Tolerance (Wp)	0~+5
Module Efficiency (%)	21.6
Voltage at Maximum Power (Vmp)	30.67
Current at Maximum Power (Imp)	6.62
Open Circuit Voltage (Voc)	34.8
Short Circuit Current (Isc)	6.96
Maximum System Voltage (VDC)	1000
Maximum Series Fuse Rating (A)	15

SOLAR CELL

Cell Type	TOPCon N-Type
Number of Busbars	16
Cell Efficiency (%)	25.4
Cell Dimensions (mm)	182.2 x 91.8 (M10R)
Number of Cells	48

TEMPERATURE COEFFICIENTS

Temperature Coefficient of Isc	0.040%/°C
Temperature Coefficient of Voc	0.260%/°C
Temperature Coefficient of Pmax	-0.320%/°C

MECHANICAL SPECIFICATIONS

Product Dimensions [W × L × T] (mm)	1179 x 785 x 2.6 ±3
Package Dimensions [W × L × T] (mm)	1218 x 855 x 70
Product Weight (kg)	2.32
Package Weight (kg)	4
Module Protection Rating	IP65

JUNCTION BOX SPECIFICATIONS

Connector	MC4
Junction Box Cable Size	12AWG
Junction Box Cable Length (mm)	300

*The above data were obtained under Standard Test Conditions (STC): irradiance of 1000 W/m², air mass AM 1.5, and a cell temperature of 25°C. The measurement uncertainty for all modules is ±6%. Actual values are subject to the applicable contractual agreements. The technical information provided in this document is for reference purposes only and does not constitute part of any contract. Specifications are subject to change without prior notice. For detailed information, please refer to the Installation and Mounting Manual.

*TommaTech® GmbH reserves the right to change product specifications without prior notice.

Ver.2607.20