



Ref. Certif. No.

SG SGS-00977

IEC SYSTEM FOR MUTUAL RECOGNITION OF TEST CERTIFICATES FOR ELECTRICAL EQUIPMENT (IECEE)
CB SCHEME

CB TEST CERTIFICATE

Product

Lithium-ion Rechargeable Battery System

Name and address of the applicant

TommaTech GmbH
Zeppelinstr. 14 - 85748 Garching b.München, Germany

Name and address of the manufacturer

TommaTech GmbH
Zeppelinstr. 14 - 85748 Garching b.München, Germany

Ratings and principal characteristics

See page 2

Trademark / Brand (if any)



Customer's Testing Facility (CTF) Stage used

-

Model / Type Ref.

Hera Indoor XkWh (X=80.3, 96.4, 112.5, 128.6, 144.6, 160.7, 176.8, 192.9, 208.9, 225.0, 241.1, 257.2)

Additional information (if necessary may also be reported on page 2)

-

National Differences:
AU

A sample of the product was tested and found to be in conformity with

IEC 62040-1:2017, IEC 62040-1:2017/AMD1:2021,
IEC 62040-1:2017/AMD2:2022

As shown in the Test Report Ref. No. which forms part of this Certificate

CQES260700094601

This CB Test Certificate is issued by the National Certification Body

SGS Testing & Control Services Singapore Pte Ltd
30 Boon Lay Way
#03-01 Singapore 609957

Date: 23/07/2026

Signature:

Jerry Xiao
Certifier

Ratings and principal characteristics

Rated voltage and energy:

Hera Indoor 80.3kWh: 256.0 Vd.c., 80.3 kWh;

Hera Indoor 96.4kWh: 307.2 Vd.c., 96.4 kWh;

Hera Indoor 112.5kWh: 358.4 Vd.c., 112.5 kWh;

Hera Indoor 128.6kWh: 409.6 Vd.c., 128.6 kWh;

Hera Indoor 144.6kWh: 460.8 Vd.c., 144.6 kWh;

Hera Indoor 160.7kWh: 512.0 Vd.c., 160.7 kWh;

Hera Indoor 176.8kWh: 563.2 Vd.c., 176.8 kWh;

Hera Indoor 192.9kWh: 614.4 Vd.c., 192.9 kWh;

Hera Indoor 208.9kWh: 665.6 Vd.c., 208.9 kWh;

Hera Indoor 225.0kWh: 716.8 Vd.c., 225.0 kWh;

Hera Indoor 241.1kWh: 768.0 Vd.c., 241.1 kWh;

Hera Indoor 257.2kWh: 819.2 Vd.c., 257.2 kWh;

Rated capacity: 314 Ah;

Battery Module: 51.2 V d.c., 314 Ah;

Battery System Operating voltage range: 208-934.4Vdc;

Max. charging current: 180 A;

Max. discharging current: 180 A;


Charging Temperature range: 0°C – 55°C;

Discharging Temperature range: -20°C – 55°C;

Class I

Date: 23/07/2026

Signature:

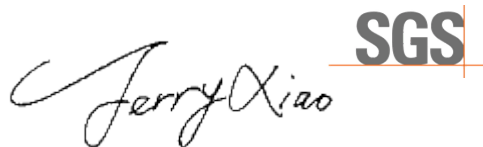

Jerry Xiao
Certifier